



ビニル絶縁付角先開形端子 (F形)

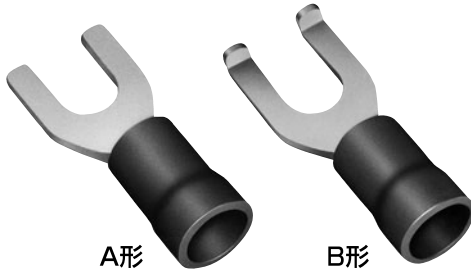

A形

B形

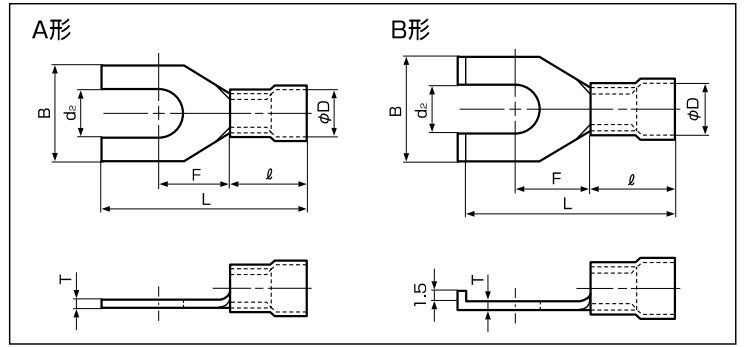

UL LISTED E42024 SF LR20812

形番	規格	寸法(mm)							標準色	適用電線範囲 撚線(mm ²)	適用圧着工具			1箱 入数 (個)								
		d ₂	B	L	F	ℓ	φD	T			手動	空気圧式	油圧式									
A形	FV1.25-B3A	3.2	5.8	20.0	6.3	9.0	4.0	0.8	赤	※ 0.25~1.65 ※ (0.3 (AWG#22)) 0.5 (AWG#20) 0.75 (AWG#18) 0.9 (1.25 (AWG#16))	YNT-2216	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0514	1,000								
	FV1.25-YS3A		6.4	19.6																		
	FV1.25-S3A	3.7	7.2	20.0																		
	FV1.25-N3A		6.2																			
	FV1.25-YS4A	4.3	6.4	19.6	7.0																	
	FV1.25-S4A		7.2	20.0																		
	FV1.25-4A	8.5																				
	FV1.25-5A	5.3	9.5																			
	FV1.25-6A	6.4	12.0	26.2	11.0																	
	FV2-N3A	3.2	5.9	20.0	6.3																	
FV2-YS3A	3.7	6.4	19.6	6.5																		
FV2-S3A		7.2	20.2		6.5																	
FV2-YS4A	4.3	6.4	19.6	6.3																		
FV2-YM4A		6.8																				
FV2-S4A	7.2	20.2	6.5																			
FV2-4A	8.5	21.0	7.3																			
FV2-5A	5.3	9.5																				
FV2-6A	6.4	12.0	26.2	11.0																		
A形	FV5.5-S3A	3.7	7.2	26.2	7.5	13.5	6.8	1.0	黄	2.63~6.64 (3.5 (AWG#12)) (5.5 (AWG#10))	YNT-1210S	YA-4 YAT-4A YAD-4A	BCT-0514	500								
	FV5.5-3A		9.5																			
	FV5.5-S4A	4.3	8.5																			
	FV5.5-4A		9.5																			
	FV5.5-5A	5.3																				
	FV5.5-6A	6.4	13.5	32.2	12.2																	
B形	FV1.25-S3B	3.7	7.5	17.3	5.1	9.0	4.0	0.8	赤	※0.25~1.65 (※0.3 (AWG#22)) 0.5 (AWG#20) 0.75 (AWG#18) 0.9 (1.25 (AWG#16))	YNT-2216	YA-1, YAD-1A YA-2, YAD-2A YAT-1A YAT-2A YA-4 YAT-4A YAD-4A	BCT-0514	1,000								
	FV1.25-3B		8.5	21.7	7.2																	
	FV1.25-S4B	4.3	7.5	17.3	5.1																	
	FV1.25-4B		8.5	22.7	7.2																	
	FV1.25-5B	5.3																				
	FV1.25-6B	6.4	13.5	28.2	11.7																	
	FV2-T3B	3.7	7.5	17.7	5.2									9.0	4.5	0.8	青	1.04~2.63 (1.25 (AWG#16)) (2.0 (AWG#14))	YNT-1614	YA-1, YAD-1A YA-2, YAD-2A YAT-1A YAT-2A YA-4 YAT-4A YAD-4A	BCT-0514	1,000
	FV2-3B		8.5	21.2	7.2																	
	FV2-T4B	4.3	7.5	17.7	5.2																	
	FV2-4B		8.5	21.2	7.3																	
FV2-5B	5.3																					
FV2-6B	6.4	13.5	28.2	11.7																		
FV5.5-S3B	3.7	7.6	24.7	6.2	13.5	6.8	1.0	黄	2.63~6.64 (3.5 (AWG#12)) (5.5 (AWG#10))	YNT-1210S	YA-4 YAT-4A YAD-4A	BCT-0514	500									
FV5.5-3B		8.5	26.2	7.5																		
FV5.5-S4B	4.3	7.6	24.7	6.2																		
FV5.5-4B		8.5	26.2	7.5																		
FV5.5-5B	5.3																					
FV5.5-6B	6.4	13.5	33.2	12.2																		

注1) ※印は電線の合計断面積が0.5mm²以上となる様にして使用すればより確実になります。

(例:0.3mm²を2つ折りにして圧着、0.5mm²はそのまま圧着)

注2) ナイロン絶縁付仕様、また丸先開形端子(X形)、丸横開形端子(Y形)仕様も製作できます。詳細は弊社までお問い合わせください。

注3) 本製品の中には多少納期を要するものもあります。